YISHUN



OEM FRAMES

ROAD | GRAVEL | MTB | EBIKE



FRAMES/CONTENTS

ROAD SERIES	01 - 06
GRAVEL SERIES	07 - 09
MTB SERIES	10 - 14
EBIKE SERIES	15 - 26





R1018-D

Features：


Endurance | Standard 1000g Lighter 900 g

Size: 470/500/530/560/590mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	470/500/530/560/590mm
Weight	A Frame 53cm: 900±30g, Fork: 385±10g, SP: 230±10g, Handlebar: 400±10g (420*90mm) B Frame 53cm: 1000±30g, Fork: 425±10g, SP: 230±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 45mm offset
Handlebar	Full internal cable routing,drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Round Φ27.2mm, 350mm length, 25mm offset
Bottom Bracket	Pressfit BB86.5
Max Chainring	53-39T
Tire Max	700*32C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

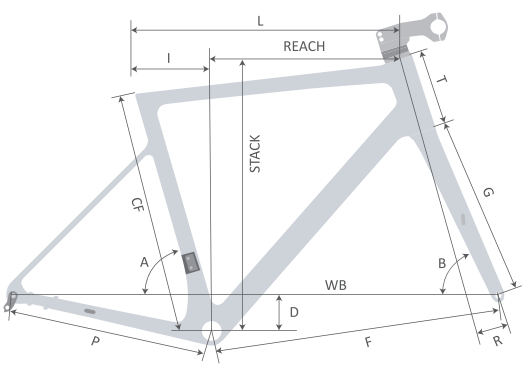

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	450	515	141.5	74.8°	71.5°	579.9	415	120	73	45	368	520.7	373.5	983.3
500	480	533	152.1	74.3°	72°	584.9	415	138	73	45	368	541.2	380.9	988.8
530	510	546	161.3	73.9°	72.5°	594.6	415	157	73	45	368	559.3	384.7	998.6
560	540	567	170.6	73.5°	72.5°	601.6	415	172.6	73	45	368	576	396.4	1005.7
590	570	582	183.7	73°	73.5°	606	415	195	73	45	368	601	398.3	1010.1

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681



R1058-D

Features：

Performance | Frame 54cm(B): 1050±30g

Performance | Frame 54cm(A): 950±30g


Size: 490/520/540/560/590mm





Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	490/520/540/560/590mm
Weight	A Frame 54cm: 950±30g, Fork: 380±10g, SP: 170±10g, Handlebar: 400±10g (420*90mm) B Frame 54cm: 1050±30g, Fork: 425±10g, SP: 200±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 45mm offset
Handlebar	Full internal cable routing,drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific 350mm length, 15mm offset
Bottom Bracket	Pressfit BB86.5
Max Chainring	55-42T
Tire Max	700*30C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

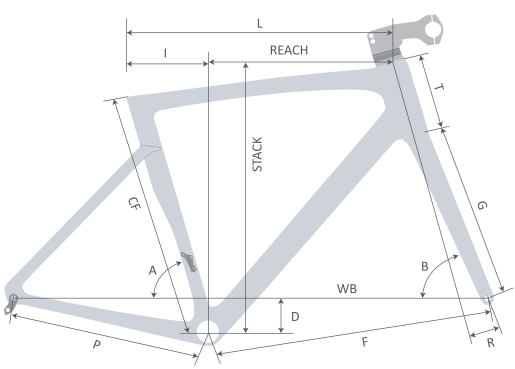

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
490	460	515	136.5	75°	71.5°	576.5	408	110	69	45	368	508	378.5	975.1
520	490	536	149.8	74°	72.5°	579.5	408	120	69	45	368	520.9	386.2	977.5
540	510	548	160.3	73.5°	73°	582.8	408	140	69	45	368	541.7	387.7	980.9
560	530	565	170.3	73.2°	73.5°	591.4	408	160	69	45	368	562.5	394.7	989.4
590	560	585	178.3	73°	73.5°	608.9	408	180	69	45	368	581.7	406.7	1007.1



R1088-D

Features：


Aero | Frame 53cm: 1050±30g

Size: 470/500/530/560/590mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	470/500/530/560/590mm
Weight	Frame 53cm: 1050±30g, Fork: 435±10g, SP: 180±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 43mm offset
Handlebar	Full internal cable routing,drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific 350mm length, 15mm offset
Bottom Bracket	Pressfit BB86.5
Max Chainring	55-42T
Tire Max	700*30C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

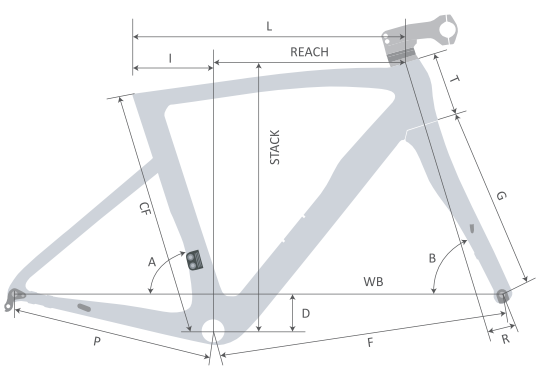

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	440	515	143.4	74.5°	71.5°	570.5	406	110	72	43	373	517.2	371.6	965.4
500	470	530	151.5	74°	72°	576.5	406	120	72	43	373	528.4	378.5	971.6
530	500	545	159	73.7°	72.5°	583	406	130	72	43	373	539.6	386	978.1
560	530	565	163.2	73.5°	73°	597.6	406	140	72	43	373	550.9	401.8	992.8
590	560	585	171.8	73°	73.5°	607.5	406	150	72	43	373	562.1	413.2	1002.8

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681



R068D

Features：


Performance｜Frame 53cm: 1140±30g

Size: 470/500/530/560/590mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	470/500/530/560/590mm
Weight	Frame 53cm: 1140±30g, Fork: 475±10g, SP: 190±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 45mm offset
Handlebar	Full internal cable routing,drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific 350mm length, 15mm offset
Bottom Bracket	Pressfit BB86.5
Max Chainring	55-42T
Tire Max	700*30C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

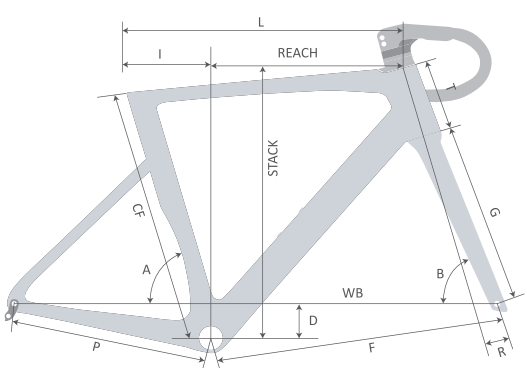

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	460	514.1	138.9	75°	71.5°	577.2	405	120	69	45	368	518.5	375.2	972.1
500	490	535.6	155.1	74°	72.5°	580.6	405	140	69	45	368	540.9	380.5	975.5
530	520	548	166.2	73.5°	73°	583.4	405	160	69	45	368	561.8	381.8	978.4
560	550	565.1	175.3	73.25°	73.5°	592.9	405	180	69	45	368	582.6	389.8	987.8
590	580	587.1	186.9	73°	73.5°	611.7	405	210	69	45	368	611.3	400.2	1007.4



R086D

Features：


Aero｜Frame 52cm: 1120±30g

Size: 480/500/520/540/560/580mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	480/500/520/540/560/580mm
Weight	Frame 52cm: 1120±30g, Fork: 485±10g, SP: 235±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 43mm offset
Handlebar	Full internal cable routing,drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific 350mm length, 16.5mm offset
Bottom Bracket	Pressfit BB86.5
Max Chainring	53-39T / 50-34T
Tire Max	700*30C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

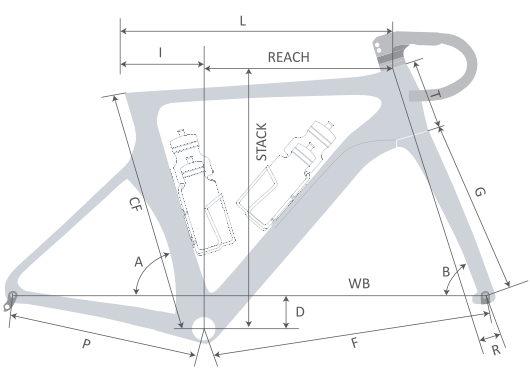

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
480	460	515	134.7	75°	72°	570.9	408	100	70	43	368	502.8	380.8	968.3
500	480	535	143	74.5°	73°	577.6	408	110	70	43	368	515.5	392.3	975.1
520	500	550	150.3	74°	73°	588	408	120	70	43	368	528	399.7	985.6
540	520	565	158.2	73.5°	73°	597.9	408	130	70	43	368	534.6	406.8	995.6
560	540	580	166.9	73°	73.5°	603	408	140	70	43	368	545.8	413.1	1000.8
580	560	595	175.6	72.5°	74°	607.9	408	150	70	43	368	557	419.4	1005.7

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681



R096D

Features：


Endurance | Frame 53cm: 1020±30g

Size: 470/500/530/550/580mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	470/500/530/560/580mm
Weight	Frame 53cm: 1020±30g, Fork: 440±10g, SP: 230±10g, Handlebar: 400±10g (420*90mm)
Head Tube	Version 1: 1 1/2" - 1 1/2" (upper 52mm Down 52mm, FSA standard) Version 2: 1 1/8" - 1 1/2" (Upper 42mm, Down 52mm)
Fork	Version 1: Full-internal cable routing, 50mm offset Version 2: Semi-internal cable routing, 50mm offset
Handlebar	Full internal cable routing,drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Round Φ27.2mm, 350mm length, 25mm offset
Bottom Bracket	Pressfit BB86.5
Max Chainring	55-42T
Tire Max	700*30C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

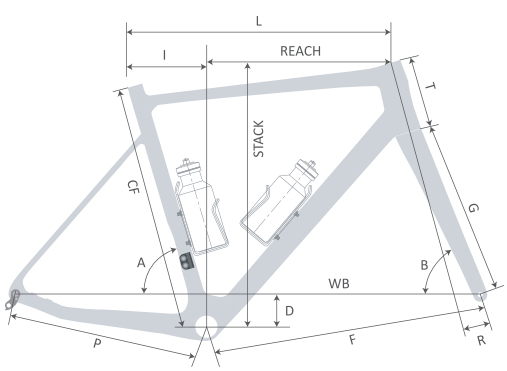

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	430	495	134.9	75°	71°	561.5	408	105	69	45	369	503.5	360.1	959.4
500	475	515	144.5	74.5°	72°	568.9	408	120	69	45	369	521.1	370.5	966.9
530	530	545	164.1	73.5°	73°	580.2	408	151	69	45	369	554.1	380.7	978.5
550	550	565	170.9	73.5°	73°	600.5	408	175	69	45	369	576.9	394.1	998.6
580	580	585	178	73.5°	73°	620.5	408	200	69	45	369	600.9	407	1018.8

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681



G085-D

Features：


Adventure | Frame 54cm: 1140±30g

Size: 490/520/540/560/590mm



Components	Frame / fork / seatpost / stem / seatclamp / headset / spacers / skewers
Frame Size	490/520/540/560/590mm
Weight	Frame 54cm: 1140±30g, Fork: 500±10g, SP: 235±10g, Stem: 170±5g
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Stem	10- degree, internal cable routing design with cable cover Size: 75/90/100/110/120/130mm
Seat Post	Full carbon seat post, OD 31.6mm, 25mm offset, 350mm length
Bottom Bracket	Pressfit BB86.5
Max Chainring	50-34T
Tire Max	700C*50C & 650B*2.25"
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

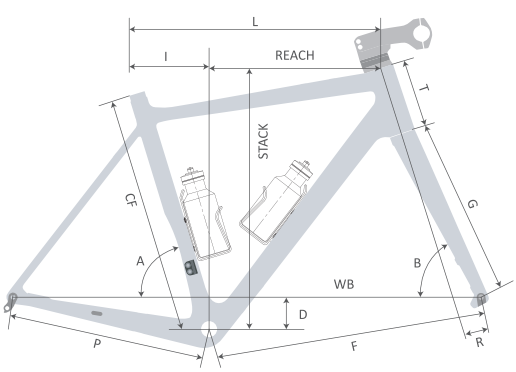

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
490	490	520	149.7	74.5°	70.5°	593.8	435	120	67	50	395	539.7	370.3	1019
520	520	535	160.7	74°	71°	600	435	140	67	50	395	560.5	374.3	1025
540	540	550	175	73°	71.5°	600	435	150	67	50	395	571.8	375	1025
560	560	565	181.3	73°	72°	610.2	435	170	67	50	395	592.8	383.7	1035.5
590	590	590	187.1	73°	72°	635.4	435	190	67	50	395	611.9	402.9	1060.9

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681

G1055-D (2024 NEW)

Features：

Adventure | Micro-suspension

UDH hanger | Storage Room


Frame 54cm: 1100±30g

Size: 490/520/540/560/580mm



Components	Frame / fork / seatpost / stem / seatclamp / headset / spacers / skewers
Frame Size	490/520/540/560/580mm
Weight	Frame 54cm: 1100±30g, Fork: 460±10g, SP:235±10g, Stem: 170±5g
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Stem	10- degree, internal cable routing design with cable cover Size: 75/90/100/110/120/130mm
Seat Post	Full carbon seat post, OD 27.2mm, 25mm offset, 350mm length
Bottom Bracket	BB86
Max Chainring	53-39T
Tire Max	700C*50C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

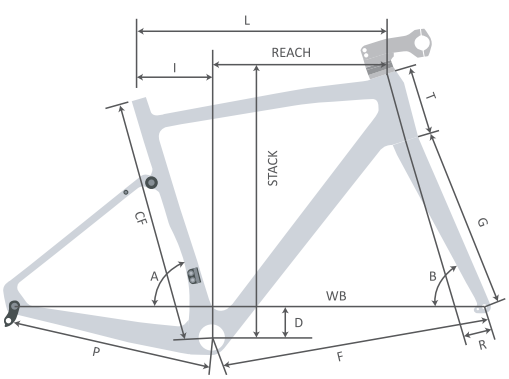

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
490	490	525	150	74.5°	70.5°	595.4	435	120	67	50	395	537.7	375	1025.5
520	520	535	160	74°	71°	599.9	435	140	67	50	395	556.6	375	1026.7
540	540	545	168.8	73°	71.5°	601.6	435	150	67	50	395	568	376.2	1028.3
560	560	560	180	73°	72°	605.8	435	170	67	50	395	588.9	380	1031.8
580	580	575	191	72.5°	72°	615.3	435	190	67	50	395	605.9	384	1041.1

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681

G075D

Features：

Adventure | Frame 54cm: 1200±30g


Max Tire 700*50C&650B*2.25"

Size: 490/520/540/560/590mm



Components	Frame / fork / seatpost / stem / seatclamp / headset / spacers / skewers
Frame Size	490/520/540/560/590mm
Weight	Frame 54cm: 1200±30g, Fork: 525±10g, SP: 230±10g, Stem: 170±5g
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Stem	10- degree, internal cable routing design with cable cover Size: 75/90/100/110/120/130mm
Seat Post	Full carbon seat post, OD 27.2mm, 25mm offset, 350mm length
Bottom Bracket	Pressfit BB86.5
Max Chainring	50-34T
Tire Max	700C*50C & 650B*2.25"
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

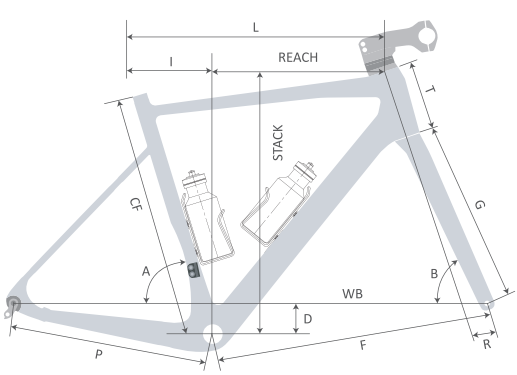

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
490	490	525	155.2	74°	70.5°	594.5	435	125	67	50	395	541.3	369.8	1020.6
520	520	535	165.1	73.5°	71°	595.4	435	140	67	50	395	557.5	369.8	1021.4
540	540	545	173.6	73°	71.5°	595.5	435	150	67	50	395	568	371.4	1021.7
560	560	560	186	72.5°	72°	600.2	435	170	67	50	395	589.8	374	1026.3
590	590	585	192.6	72.5°	72.5°	619.9	435	190	67	50	395	610.8	392.4	1046.1

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681



FS828 (2024 NEW)

Features：

Cross Country | UDH hanger


2000±40g / M / BB92

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Frame Size	S/M/L/XL
Frame Weight	A: 1850±40g / M / BB92 B: 2000±40g / M / BB92
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Tube	Φ31.6mm (clamp 34.9) Droper seat post compatible
Rear Shock Size	Ø10*30L/190*40mm/Ø8*30L
Travel	Front 120mm, Rear 100mm
Bottom Bracket	BB92/BSA
Max Tire	29er *2.6"
Rotor	Post Mount 160mm
Max Chainring	36T
Brake Type	Disc Brake
Dropout O.L.D	TA Φ12*148mm, UDH hanger

Geometry

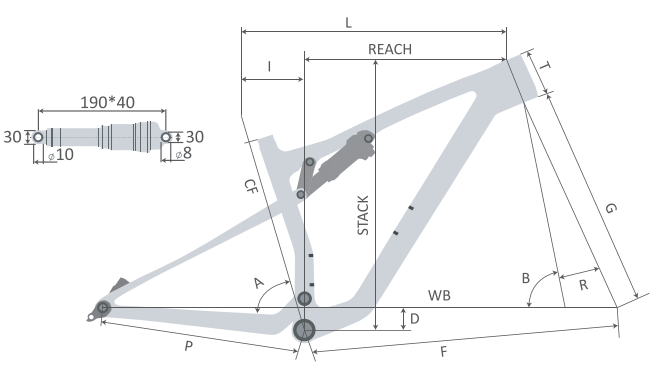

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S"	395	563	151.6	75.5°	67.5°	684	445	95	48	44	505	586	411.4	1124.7
M"	430	598	153.1	75.5°	67.5°	719	445	100	48	44	505	591	445	1160.3
L"	470	626	156.4	75.5°	67.5°	749	445	115	48	44	505	605	469.6	1190.6
XL"	520	656	161.1	75.5°	67.5°	782	445	135	48	44	505	623	494.9	1223.6



FS848(Promotion NOW)

Features：


Trail｜2380±40g / M / BB92

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Frame Size	S/M/L/XL
Frame Weight	2380±40g / M / BB92
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm,FSA standard)
Seat Tube	Φ31.6mm (clamp 34.9) Droper seat post compatible
Seatpost Insert Length	S 190mm , M / L / XL 220mm
Rear Shock Size	Ø12.7*12.7L/190*45mm/Ø8*20L (No bushing kit needed)
Travel	Front 130-150mm, Rear 130mm
Bottom Bracket	Pressfit BB92
Max Tire	29er *2.6"
Rotor	Post Mount 160mm
Max Chainring	36T
Brake Type	Disc Brake
Dropout O.L.D	TA Φ12*148mm, Standard & UDH hanger

Geometry

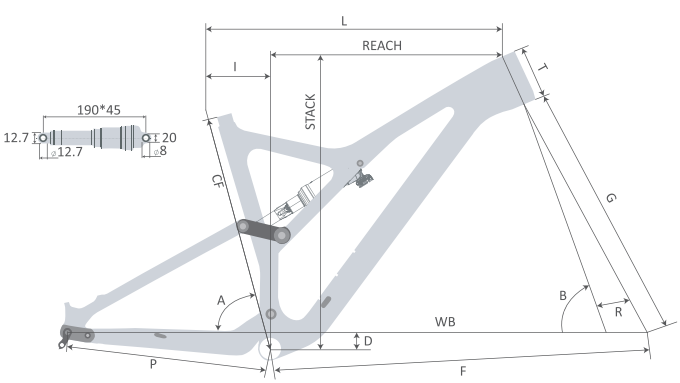

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	410	575	144.3	77°	66.5°	743.8	445	100	34.8	51	565	625.2	430.7	1186.6
M	440	605	145.4	77°	66.5°	774.7	445	105	34.8	51	565	629.8	459.6	1217.6
L	490	635	146.5	77°	66.5°	805.5	445	110	34.8	51	565	634.4	488.5	1248.5
XL	520	655	147.5	77°	66.5°	826.5	445	115	34.8	51	565	639	507.5	1269.4

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681

FS896

Features：

Mountain/Enduro | UDH hanger


2620±40g / M / BB92

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Frame Size	S/M/L/XL
Frame Weight	2620±40g / M / BB92
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Tube	Φ31.6mm (clamp 34.9) Droper seat post compatible
Seatpost Insert Length	S 170mm , M 200mm , X / XL 220mm
Rear Shock Size	Ø8*25L/230*60mm/Ø10*54(trunion mount)
Travel	Front 160mm, Rear 160mm
Bottom Bracket	Pressfit BB92
Max Tire	29er *2.6"
Rotor	Post Mount 180mm
Max Chainring	36T
Brake Type	Disc Brake
Dropout O.L.D	TA Φ12*148mm, Standard & UDH hanger

Geometry

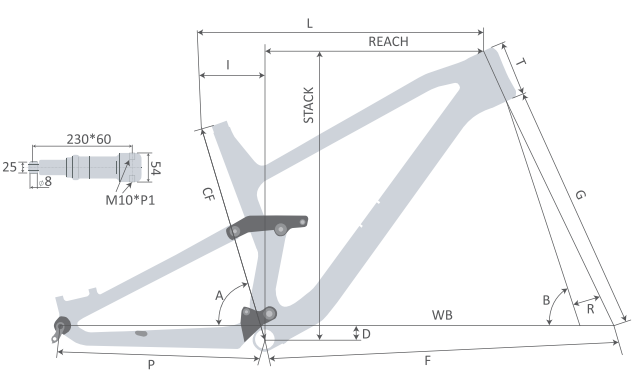

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	400	585	162.2	75°	65°	748.8	445	100	28	51	561	605.5	422.8	1192.4
M	430	605	164.7	75°	65°	770.6	445	110	28	51	561	614.6	440.3	1214.3
L	480	635	167.1	75°	65°	802.4	445	120	28	51	561	623.6	467.9	1246
XL	520	657	169.5	75°	65°	826.2	445	130	28	51	561	632.7	487.5	1269.8

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681



M536

Features：

Cross Country | UDH hanger


1150±30g / M / BB92

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal (cables run through headtube)
Frame Size	S/M/L/XL (15"/17"/19"/20.5")
Frame Weight	1150±30g / M / BB92
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Seat Tube	Φ31.6mm (clamp 34.9) Droper seat post compatible
Front Travel	100mm
Bottom Bracket	Pressfit BB92
Max Chainring	36T
Tire Max	29er *2.3"
Brake Type	Disc Brake
Rotor	Post Mount 160mm
Dropout O.L.D	TA Φ12*148mm, UDH hanger

Geometry

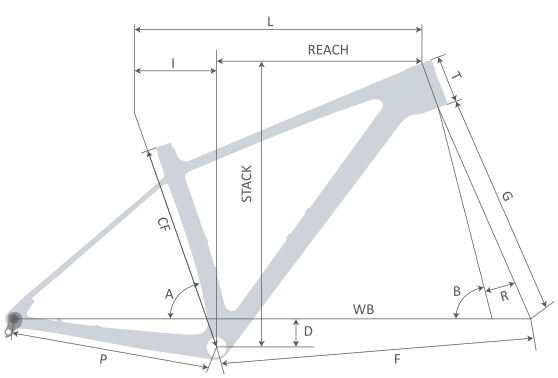

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	390	575	173.9	73.6°	69.5°	656.8	430	95	60	51	490	591	401.1	1079.9
M	440	600	175.3	73.6°	69.5°	681.8	430	100	60	51	490	595.7	424.7	1104.9
L	480	620	179.5	73.6°	69.5°	703.1	430	115	60	51	490	609.8	440.5	1126.3
XL	530	640	182.2	73.6°	69.5°	723.8	430	125	60	51	490	619.1	457.8	1147.1

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681



M596

Features：

Cross Country | UDH hanger


1190±30g / M / BB92

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal (cables run through headtube)
Frame Size	S/M/L/XL
Frame Weight	1190±30g / M / BB92
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Seat Tube	Φ27.2mm (Φ31.6mm clamp)
Front Travel	100mm
Bottom Bracket	Pressfit BB92
Max Chainring	36T
Tire Max	29er *2.3"
Brake Type	Disc Brake
Rotor	Post Mount 160mm
Dropout O.L.D	TA Φ12*148mm, Standard & UDH hanger

Geometry

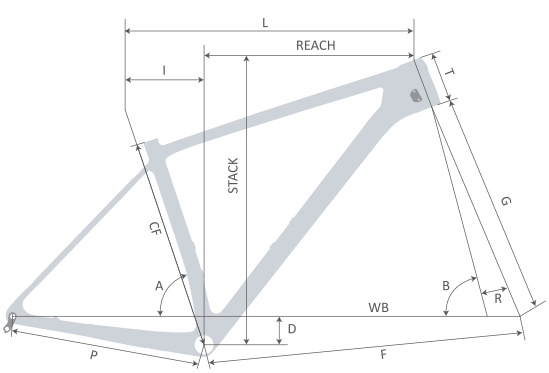

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	385	579	174.9	74°	68.5°	667.5	425	95	63	42	506	609.5	404.1	1084.8
M	430	604	176.5	74°	68.5°	692.4	425	100	63	42	506	614.2	427.5	1109.8
L	480	633	179	74°	68.5°	722.7	425	110	63	42	506	623.5	454	1140.3
XL	530	662	183	74°	68.5°	753.1	425	125	63	42	506	637.5	479	1170.8


Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681

E801 (NEW)

Features:


SHIMANO EP8 | Frame: 3800±40g / M

Size: S/M/L

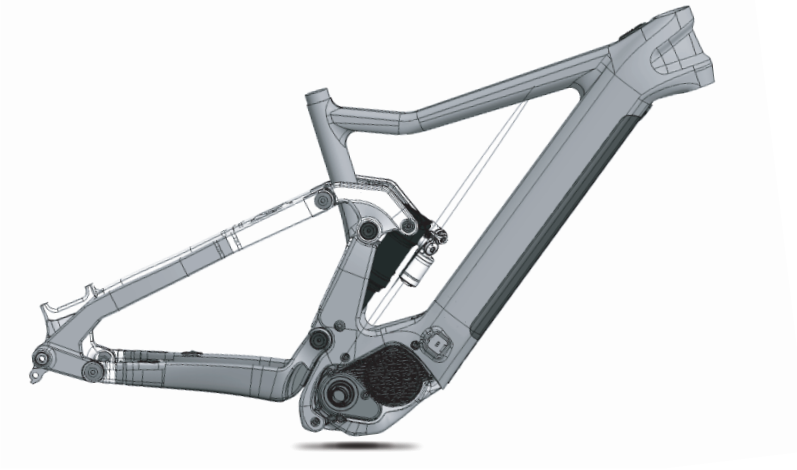

Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal
Frame Size	S/M/L
Frame Weight	3800±40g / M
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	Ø10*20L/185*55mm/Ø10*54L (trunion mount) bushing kit: 10*20mm
Recommended Shock	SRAM Delux-rlr-185x55mm
Travel	Front: 160mm, Rear: 160mm
Motor	Shimano DU-E8000 or EP800 or EP801
Battery	Darfon E4COM (720Wh) / E4COL (835Wh)
Max Chainring	34T (SM-CRE80)
Max Tire	29*2.6" or 27.5*3.0"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12*148mm, Standard & UDH

Geometry

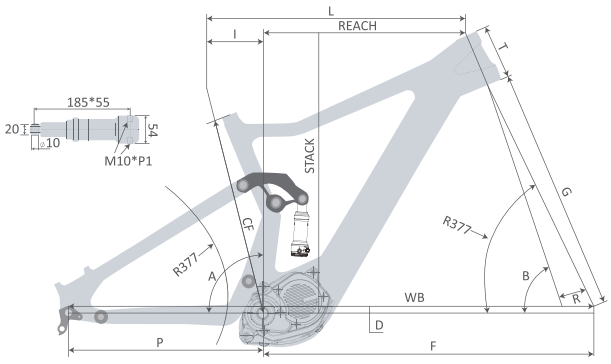

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	406	590	161.5	75°	66°	748	450	110	15	51	571	614.5	433.2	1198.7
M	457	601	167.1	75°	66°	770.7	450	120	15	51	571	625.5	442.9	1220.3
L	508	630	170.6	75°	66°	790.4	450	130	15	51	571	632.7	462.5	1242

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681

SHIMANO

E879

Features:


SHIMANO EP8 | Frame: 3700±40g / M

Size: S/M/L



Components	Frame / seatclamp / headset / rear skewer
Routing System	Semi-internal (cables run through side of headtube)
Frame Size	S/M/L/XL
Frame Weight	3700±40g / M
Head Tube	Tapered 1 1/8" - 1 1/2" (upper 44mm down 56mm, FSA No.57ACB)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	Ø10*20L/185*55mm/Ø10*54L (trunion mount) bushing kit: 10*20mm
Recommended Shock	SRAM Delux-rlr-185x55mm
Travel	Front: 150mm, Rear: 150mm
Motor	Shimano DU-E8000 or EP800 or EP801
Battery	Shimano BT-E8036 630wh
Max Chainring	34T (SM-CRE80)
Max Tire	29*2.35" or 27.5*3.0"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12*148mm

Geometry

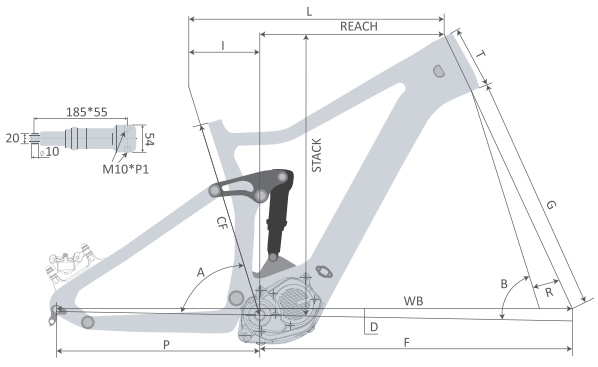

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	400	585	177.8	74°	66°	737.4	460	120	15	51	563	621	411.2	1197
M	440	601	179.5	74°	66°	749.3	460	130	15	51	563	625.5	421.5	1209
L	483	620.1	182.6	74°	66°	769.4	460	140	15	51	563	634.7	437.5	1229
XL	520	640	184.2	74°	66°	791.8	460	150	15	51	563	643.8	455.8	1251.4

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681

SHIMANO

E561

Features:


SHIMANO EP8 | Frame: 2200±40g / M

Size: S/M/L



Components	Frame / seatclamp / headset / rear skewer
Routing System	Semi-internal (Cables run through side of headtube)
Frame Size	S/M/L
Frame Weight	2200±40g / M
Head Tube	Tapered 1 1/8" - 1 1/2" (upper 44mm down 56mm, FSA No.57ACB)
Seat Post	31.6mm(34.9mm clamp)
Motor	Shimano DU-E8000 or EP800 or EP801
Battery	Shimano BT_E8036(630wh)
Travel	Front Travel 100mm
Max Chainring	34T
Max Tire	29*2.35" or 27.5*3.0"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 160mm
Dropout O.L.D	Rear TA Φ12*148mm

Geometry

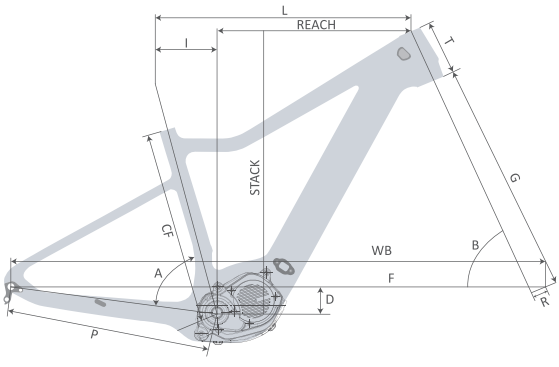

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	400	580	170.2	74.5°	67.5°	697.2	450	110	60	51	511	614.2	409.8	1140.6
M	435	605	172.9	74.5°	67.5°	723.2	450	120	60	51	511	623.4	432.1	1166.7
L	485	625	175.5	74.5°	67.5°	744.3	450	130	60	51	511	632.7	449.5	1187.9

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681



E1029-gravel (NEW)

Features：

Bafang M820 | Frame: 1450g/L


Size: XS/X/S/M/L/XL

BAFANG



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	XS/S/M/L/XL
Weight	Frame L: 1450±30g, Fork: 450±10g, SP: 200±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Handlebar	Full internal cable routing,drop 125mm, reach 81mm with DI2 hole Width: 400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Ø 27.2mm offset, 350mm length
Motor	Bafang M820
Battery	BT F044 374WH + Extender battery BTF 420 252WH
Max Chainring	53-39T
Max Tire	700*50C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

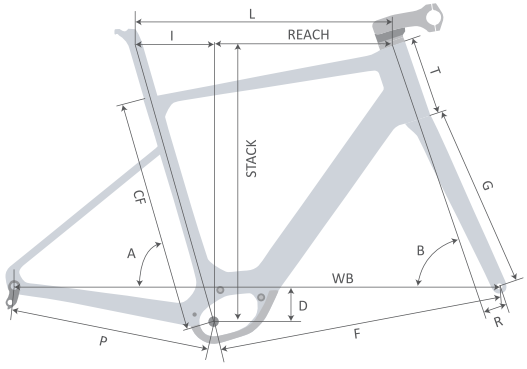

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
XS	440	515	158	74°	70.5°	588	435	143	75	50	395	565	357	1011
S	470	530	160	74°	70.5°	603	435	148	75	50	395	570	370	1026
M	500	548	168	73.5°	71°	615	435	167	75	50	395	590	380	1039
L	530	565	177	73°	71.5°	624	435	186	75	50	395	610	388	1048
XL	560	580	190	72.5°	72°	625	435	195	75	50	395	620	390	1049

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681

BAFANG

E021

Features：


Bafang M800 | Frame: 1750g/530mm

Size: 470/500/530/560/590mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	470/500/530/550/580mm
Weight	Frame 53cm: 1750±30g, Fork: 460±10g, SP: 200±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Handlebar	Full internal cable routing,drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific seatpost 18mm offset, 350mm length
Motor	Bafang M800
Battery	BAFANG BTF05 200wh
Max Chainring	53-39T
Max Tire	700*32C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

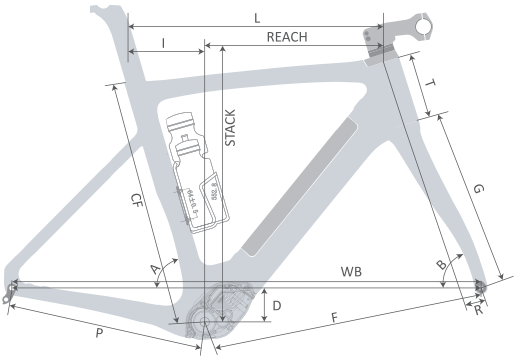

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	470	515	149.7	74.5°	71.5°	579	415	130	72	50	380	539.8	365.3	983.3
500	500	525	155.3	74°	72°	579.3	415	130	72	50	380	541.6	369.7	983.5
530	530	545	161.7	73.7°	72.5°	591.8	415	140	72	50	380	552.9	383.3	996.1
550	550	560	175.4	73°	73°	594.6	415	160	72	50	380	573.8	384.6	999
580	580	590	187.5	72.5°	73.5°	613.7	415	180	72	50	380	594.7	402.5	1018.2

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681



E868 (NEW)

Features：

Bafang M820 | Frame: 2800g / M


Size: S/M/L

BAFANG



Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal
Frame Size	S/M/L
Frame Weight	2800±40g / M
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	Ø10*20L/210*50mm / Ø10*54L
Recommended Shock	SRAM Delux-rlr- 210 x 50mm
Seat Post	Front: 130mm, Rear: 130mm
Motor	BAFANG M820
Battery	BT F044 374WH + Extender battery BTF 420 252WH
Max Chainring	36T
Max Tire	29*2.6"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12*148mm

Geometry

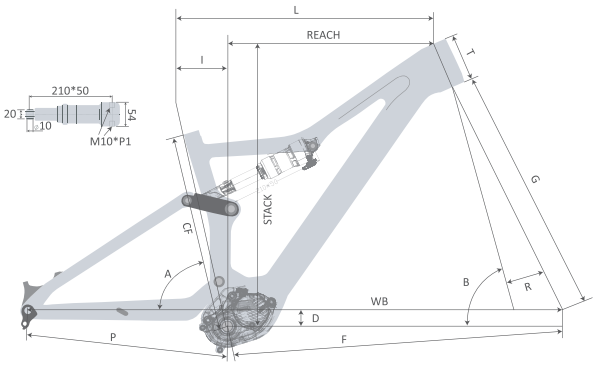

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	406	580	140.1	77°	66.5°	744.9	445	100	34.8	51	545	606.9	439.9	1187.7
M	457	605	141.2	77°	66.5°	770.75	445	105	34.8	51	545	611.48	463..8	1213.6
L	508	630	142.2	77°	66.5°	796.7	445	110	34.8	51	545	616.1	487.8	1239.6

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681



E898 (NEW)

Features：

Bafang M510 | Frame: 3000g / M


Size: S/M/L

BAFANG



Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal
Frame Size	S/M/L/XL
Frame Weight	3000±40g / M
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	230*65=156.7 / 230*62.5=150.7 / 230*60=144.5
Recommended Shock	SRAM Delux-rlr- 230 x 62.5mm
Travel	Front: 150mm, Rear: 160mm
Motor	BAFANG M510
Battery	BAFANG SYR014 (720wh)
Max Chainring	36T
Max Tire	29*2.6"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12*148mm

Geometry

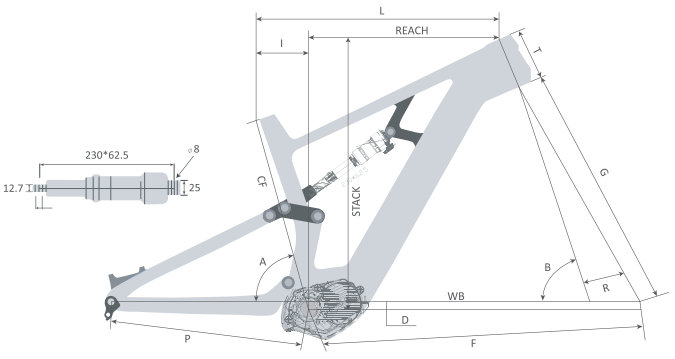

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	406	590	161.5	75°	66°	748	455	110	15	51	571	614.4	433.2	1107
M	457	610	167.1	75°	66°	770.7	455	120	15	51	571	625.5	442.9	1225.4
L	508	630	170.6	75°	66°	790.4	455	130	15	51	571	632.7	462.5	1245

BOSCH

E808

Features:


Bosch GEN4 BES3 | Frame: 3800±40g / M

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal
Frame Size	S/M/L/XL
Frame Weight	3800±40g / M
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	Ø10*30L/185*55mm/Ø10*54L (trunion mount) bushing kit: 10*30mm
Recommended Shock	SRAM Delux-rlr- 185 x 55mm / sdlx-rc3 - 185 x 55mm / sdlx-rtr - 185 x 55mm
Travel	Front: 160mm, Rear: 160mm
Motor	Bosch GEN4 BES3
Battery	Bosch bes3_pt750_pivot rail horizontal
Max Chainring	34T (SM-CRE80)
Max Tire	29*2.6" or 27.5*3.0"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12*148mm

Geometry

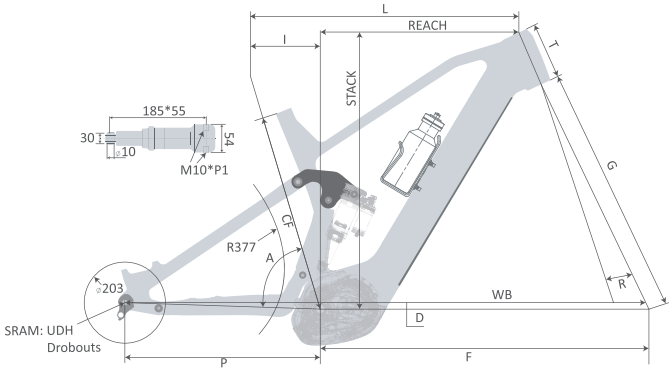

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	405	591.4	173.4	74.5°	64.5°	767.1	450	120	11.1	51	578	620	418	1216.8
M	440	602.4	173.9	74.5°	64.5°	779.9	450	130	11.1	51	578	629.1	428.5	1229.7
L	480	621.5	176.5	74.5°	64.5°	800.8	450	140	11.1	51	578	638.3	445	1250.6
XL	520	641.5	178.9	74.5°	64.5°	822.7	450	150	11.1	51	578	647.5	462.6	1272.5

BOSCH

E802 (NEW)

Features:


Bosch SX | Frame: 2800±40g / M

Size: S/M/L



Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal
Frame Size	S/M/L
Frame Weight	2800±40g / M
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	Ø8*20L/190*45mm (trunion mount) bushing kit: 8*20mm
Rear Axle	179mm M12*P1.0*L15
Travel	Front: 130mm, Rear: 130mm
Motor	Bosch-SX
Battery	Bosch CPT400
Max Chainring	36T
Max Tire	29*2.6"
Sram Deluxe	230*65
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12*148mm

Geometry

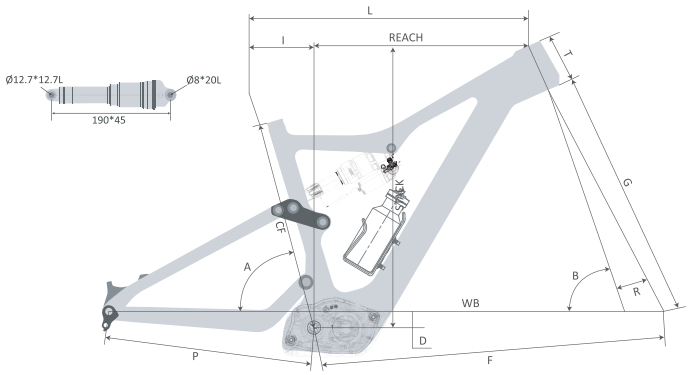

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	406	580	140.1	77°	66.5°	744.9	445	100	34.8	51	545	606.9	439.9	1187.7
M	457	605	141.2	77°	66.5°	770.75	445	105	34.8	51	545	611.48	463.8	1213.6
L	508	630	142.2	77°	66.5°	796.7	445	110	34.8	51	545	616.1	487.8	1239.6

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681

BOSCH

E812 (NEW)

Features:


Bosch CX | Frame: 3500±40g / M

Size: S/M/L



Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal
Frame Size	S/M/L
Frame Weight	3500±40g / M
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	Ø8*25L/230*62.5/60/65mm (trunion mount) bushing kit: 8*25mm
Travel	Front: 150mm, Rear: 160mm
Motor	Bosch-CX
Battery	Bosch power Tube 600/800W
Max Chainring	36T
Max Tire	29*2.6"
Sram Deluxe	230*65
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12*148mm

Geometry

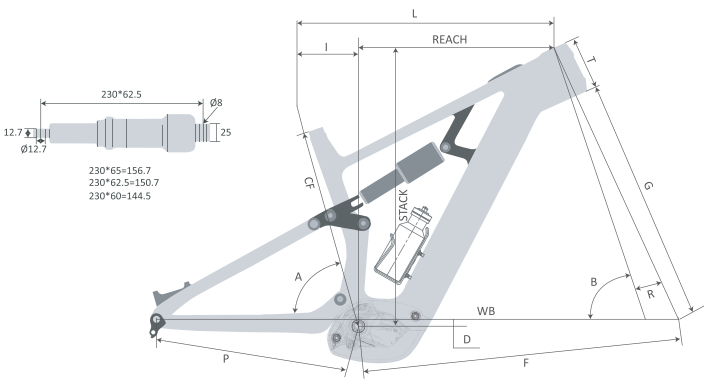

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	406	590	162.1	75°	66°	749	455	110	15	51	577	619.8	431.7	1108.4
M	457	610	168.5	75°	66°	771.7	455	120	15	51	577	630.9	441.4	1226.4
L	508	630	171.2	75°	66°	791.4	455	130	15	51	577	638.1	461	1246.4

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681

BOSCH

E602-gravel (NEW)

Features:


Bosch SX | Frame: 1650±30g / M

Size: XS/S/M/L/XL



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	XS/S/M/L/XLmm
Weight	Frame 53cm: 1650±30g, Fork: 450±10g, SP: 200±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 48mm offset
Handlebar	Full internal cable routing,drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific seatpost 18mm offset, 350mm length
Motor	Bosch SX
Battery	Bosch CPT400
Max Chainring	53-39T
Max Tire	700*50C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

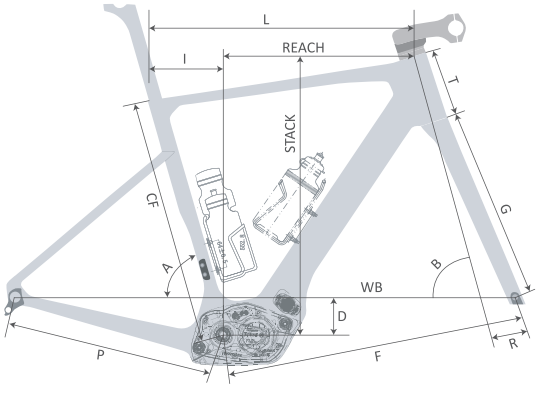

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
XS	450	526	146	75°	71°	597	435	109.4	78	48	400	545	380	1020
S	480	540	155	74.5°	71.5°	602	435	123.3	78	48	400	560	385	1025
M	510	561	166	74°	72°	614	435	142.4	78	48	400	580	395	1037
L	540	583	178	73.5°	72.5°	625	435	161.5	78	48	400	600	405	1048
XL	570	600	185	73.5°	72.5°	643	435	187.7	78	48	400	625	415	1066

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681

FAZUA

E051

Features:


Fazua Evation | Frame: 1750g/530mm

Size: 490/520/540/560/590mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	470/500/530/550/580mm
Weight	Frame 53cm: 1750±30g, Fork: 450±10g, SP: 200±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Handlebar	Full internal cable routing,drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific seatpost 18mm offset, 350mm length
Motor	Fazua Evation
Battery	Fazua 250w 25km/h
Max Chainring	53-39T
Max Tire	700*32C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

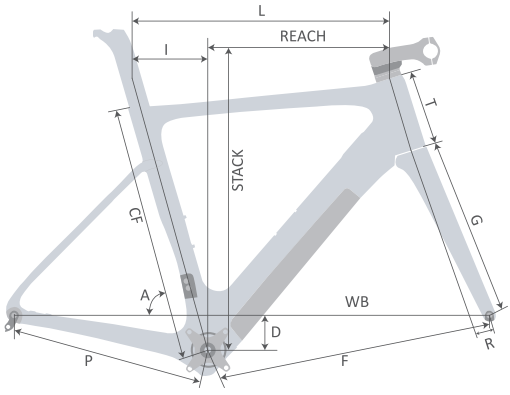

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	470	515	149.7	74.5°	71.5°	579	415	130	72	50	380	539.8	365.3	983.3
500	500	525	155.3	74°	72°	579.3	415	130	72	50	380	541.6	369.7	983.5
530	530	545	161.7	73.7°	72.5°	591.8	415	140	72	50	380	552.9	383.3	996.1
550	550	560	175.4	73°	73°	594.6	415	160	72	50	380	573.8	384.6	999
580	580	590	187.5	72.5°	73.5°	613.7	415	180	72	50	380	594.7	402.5	1018.2

Tel: +86-592-5620028 Email: info@yishunbike.com Web: www.yishunbike.com Germany Tel: +49-2154-9508681